


Specifications

SMART Slate™ Wireless Slate

Model WS200

Physical Specifications

Size	10 3/8" W × 8 1/2" H × 1" D (26.4 cm × 21.6 cm × 2.6 cm)
Active Area	6 3/4" W × 4 1/4" H (17.3 cm × 10.8 cm)
Weight	1 lb. 4 oz (600 g)
Shipping Size	10 6/8" W × 13" H × 3 2/8" D (27.2 cm × 33.1 cm × 8.2 cm)
Shipping Weight	2 lb. 6 oz (1.1 kg)

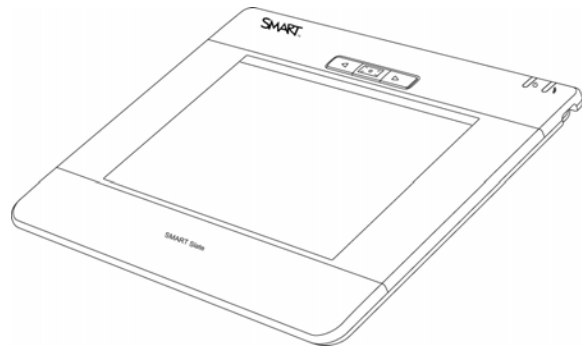

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb (0.9 kg).

Standard Features

Software	Includes SMART Product Drivers. Upgrades available at www2.smarttech.com/st/en-US/Support/Downloads/SBS/Windows/NB10DriverOnly.htm .
Operating System Requirements	Supports Windows® operating systems. See the SMART Notebook software specifications for a complete list of system requirements.
Communication Interface	Bluetooth® wireless technology 2.1 with EDR
Electro-magnetic Resonance Technology	Allows you to rest your hand and write naturally on the workspace without interfering with the digital ink.
Maximum Report Rate	133 points per second
Coordinate Resolution	+/- 0.5 mm with +/- 2 mm in the corners of the workspace

Bluetooth Wireless Adapter	Class 2 adapter connects wirelessly with a range of 32' (10 m).
Underlay and Icon Strip	Allows you to select from many common tools. Pointer, eraser, four colors of digital ink, right-click, keyboard, screen capture and control panel are the default tools. You can customize the icon strip to include the tools you use the most.
Anti-slip Feet	Four anti-slip feet keep the slate stable on flat surfaces.
Buttons	Three customizable buttons. Previous Page, start SMART Notebook and Next Page are the default button settings.
Pen	Battery-free pen. Detects pen from a height of 4.5 mm. Pen accuracy is 0.5 mm.
Power Requirements	5V DC, USB. Draws 500 mA while charging.
Cables	USB charging cable
Battery	Rechargeable lithium ion battery provides at least 24 hours of continuous use per charge. 6.5 hours for a full recharge. 3.7V, 1800 mA
Environmental Compliance	RoHS (Europe), EU WEEE
Regulatory Certifications	FCC, CE, C-Tick, CB, IC
Warranty	Two-year limited warranty
Range	32' (10 m)
Data Transfer Rate	133 points per second

Storage and Operating Specifications


Storage	-4°F–140°F (-20°C–60°C) with 30%–90% humidity, non-condensing
Operating	41°F–104°F (5°C–40°C) with 30%–80% humidity, non-condensing

SMART Order Numbers


WS200-1	SMART Slate WS200 and Bluetooth USB wireless adapter
BTWS200	Bluetooth USB wireless adapter

Physical Dimensions

Front View

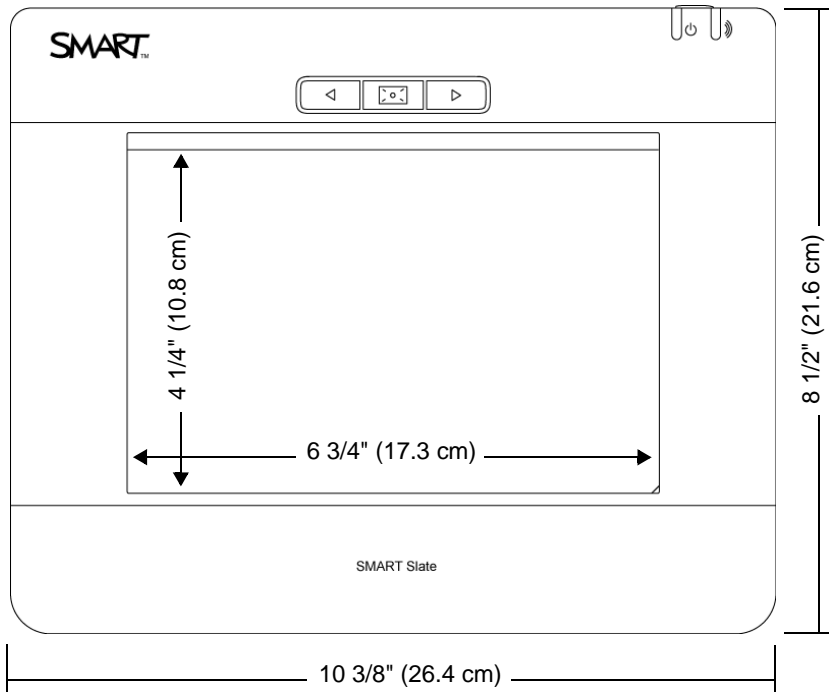

Side View (Left)



www.smarttech.com/support www.smarttech.com/contactsupport
Support +1.403.228.5940 or Toll Free 1.866.518.6791 (U.S./Canada)



©2009 SMART Technologies ULC. All rights reserved. The SMART logo, SMART Slate and smarttech are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. The Bluetooth wordmark is registered and owned by Bluetooth SIG, Inc. and use of such marks by SMART Technologies ULC is under license. All other third-party product and company names may be trademarks of their respective owners. Patent No. US6320597; US6326954; US6741267; US7151533; US7499033; CA2252302. Other patents pending. Contents are subject to change without notice. 11/2009.